

#9/1/2008
4/4/03

RECEIVED
APR 0 2 2003
TC 1700

DECLARATION



I, Mari Kawanishi, a staff member of TAIYO, NAKAJIMA & KATO, Seventh Floor, HK-Shinjuku Bldg., 3-17, Shinjuku 4- chome, Shinjuku-ku, Tokyo 160-0022, Japan, do hereby declare that I am well acquainted with the English and Japanese languages and I hereby certify that, to the best of my knowledge and belief, the following is a true and correct translation made by me into the English language of the accompanying copies of the documents in respect of Japanese Patent Application No.2000-17535 filed on 26th January 2000 in the name of BRIDGESTONE CORPORATION.

Dated this 18th day of March, 2003

Mari Kawanishi

Mari Kawanishi

[DOCUMENT NAME]	Application for Patent
[REFERENCE NUMBER]	BRP-00008
[FILING DATE]	26th January 2000
[CONSIGNEE]	The Director General of the Patent Office
[I. P. C.]	B60C 11/00
[INVENTOR]	
[ADDRESS OR RESIDENCE]	3-5-5-434, Ogawahigashi-cho Kodaira-shi, Tokyo, Japan
[NAME]	Yoshihisa Takubo
[APPLICANT]	
[I. D. NUMBER]	000005278
[NAME]	BRIDGESTONE CORPORATION
[AGENT]	
[I. D. NUMBER]	100079049
[ATTORNEY]	
[NAME]	Jun Nakajima
[TELEPHONE NUMBER]	03-3357-5171
[APPOINTED AGENT]	
[I. D. NUMBER]	100084995
[ATTORNEY]	
[NAME]	Kazuyoshi Kato
[TELEPHONE NUMBER]	03-3357-5171
[APPOINTED AGENT]	
[I. D. NUMBER]	100085279
[ATTORNEY]	
[NAME]	Katsuichi Nishimoto
[TELEPHONE NUMBER]	03-3357-5171
[APPOINTED AGENT]	
[I. D. NUMBER]	100099025
[ATTORNEY]	

[NAME]	Koji Fukuda	
[TELEPHONE NUMBER]	03-3357-5171	
[INDICATION OF FEE]		
[I. D. NUMBER IN ADVANCE PAYMENT REGISTER]		006839
[AMOUNT OF FEE]	21000	
[LIST OF FILED DOCUMENT]		
[DOCUMENT]	Specification	1
[DOCUMENT]	Drawings	1
[DOCUMENT]	Abstract of the Disclosure	1
[GENERAL POWER OF ATTORNEY NUMBER]		9705796

[DOCUMENT NAME] SPECIFICATION

[TITLE OF THE INVENTION]

PNEUMATIC TIRE

[WHAT IS CLAIMED IS]

[Claim 1] An pneumatic tire comprising:

a tread;

a lug groove extending from a shoulder side of said tread toward a tire central plane, the lug groove being provided in plurality at said tread in the tire circumferential direction to form a lug pattern; and

a recess portion being provided in a center region of the tread, the center region extending in the tire circumferential direction with a width that is 50% of a maximum width of tire ground contacting portion so as to be symmetrical with respect to the tire central plane of said tread,

wherein a negative ratio of the center region other than said lug groove is set to 10% to 25%.

[Claim 2] A pneumatic tire according to claim 1, wherein a depth of said recess portion is 10% to 45% of the maximum depth of said lug groove.

[Claim 3] A pneumatic tire according to claim 1 or 2, wherein

said recess portion is at least one auxiliary groove sequentially formed in the tire circumferential direction.

[Claim 4] A pneumatic tire according to any one of claims 1 to 3, wherein a depth of said lug groove is made gradually shallower from the shoulder side toward the tire central plane.

[Claim 5] A pneumatic tire according to claim 1, wherein a maximum depth of said lug groove in said center region that corresponds to 50% of the maximum width of the tire ground contacting portion is 60 mm or more.

[DETAILED DESCRIPTION OF THE INVENTION]

[0001]

[Technical Field of the Invention]

The present invention relates to a pneumatic tire. In particular, the present invention relates to a pneumatic tire having a lug pattern capable of improving a heat radiation effect of a tread used for a heavily loaded vehicle.

[0002]

[Prior Art]

Conventionally, a tread rubber with a good wear resistance has been used in order to ensure improvement in wear resistance of an pneumatic tire (hereinafter, referred to as

a tire, for convenience). In addition, in a tread as well, there has been used a method in which a tread volume is increased, a tread gauge is thickened, and a negative ratio in tread is lowered.

[0003]

[Problems to be Solved by the Invention]

In the meantime, recently, an increase of tire size, low aspect ratio trend of the tire, and heavy loading on the tire of a construction vehicle is accelerated due to the increase in size thereof in order to achieve a higher productivity. Moreover, a construction vehicle with a higher speed is also being widely developed. Under such a circumference, heat generation of a tread portion is increased due to a higher speed of the (heavy) vehicle, which may cause troubles such as heat separation of the tread portion.

[0004]

That is, heat generation of the tire tread portion is caused by repetition of a tread compression stress experienced in a tire grounding region and a bending stress generated at a stepping-in portion and a kicking-out portion. In particular, in a heavily loaded tire for an off-the-road vehicle in which the tread gauge thickness is relatively thick, the tread volume at the tire center portion is increased, and thus heat buildup

therein is also increased. As a result, the temperature at the center portion increases during vehicle running, which may cause heat separation trouble.

[0005]

The present invention has been made in consideration of the above facts. It is an object of the present invention to provide an pneumatic tire capable of reducing the wear of a tread to the minimum, and improving a heat radiation effect.

[0006]

[Means for Solving the Problems]

According to claim 1 of the present invention, there is provided an pneumatic tire comprising: a tread; a lug groove extending from a shoulder side of said tread toward a tire central (equatorial) plane, the lug groove being provided in plurality at said tread in the tire peripheral direction to form a lug pattern; and a recess portion being provided in a center region of the tread, the center region extending in the tire peripheral direction with a width that is 50% of a maximum width of tire ground contacting portion so as to be symmetrical with respect to the tire central plane of said tread, wherein a negative ratio of the center region other than said lug groove is set to 10% to 25%.

[0007]

An action of the pneumatic tire according to claim 1 will be described below.

[0008]

The basic performance required for a pneumatic tire, in particular, a heavily loaded pneumatic tire adapted for off-the-road running, is evaluated by the tire life in which the tire is safely used before the tire becomes too worn to be used. During vehicle running, a tire tread portion generates heat. This heat generation or radiation is particularly problematic soon after the start of using a new tire in which the tread gauge is relatively thick. Further, in general, a new tire is often mounted as a front tire. The front tire receives a relatively large side force input, and is thermally affected in particular.

[0009]

In the present invention, a recess portion is provided in a center region that corresponds to 50% of the maximum width of tire ground contacting region, and the negative ratio of the center region other than the lug groove is set to 10% to 25%. Thus, the amount of heat generated in the tire tread can be reduced, a surface area of the tire can be increased, and the heat radiation properties of the tire can be improved. Further,

at the same time, a recess portion provided in the tire center region decreases the tire tread volume and could facilitate wear in some cases. However, due to the negative ratio being set within the above unique range, the wear can be reduced to the minimum.

[0010]

When the negative ratio is less than 10%, heat radiation properties are lowered. When the rate is more than 25%, a tread is likely to be worn quickly. If the negative ratio of the center region is set within the above particular range, the improvement in heat radiation properties and reduction of wear can be made compatible with each other.

[0011]

In the present invention, a pneumatic tire, when it is used, is mounted to a rim prescribed in the regulations issued by JATMA (Japan), TRA (U.S.A), and ETRTO (Europe) or the like according to their size, and such a rim is generally called a regular rim.

[0012]

In the present specification as well, the "regular rim" refers to a standard rim of size defined in YEAR BOOK 1999 issued by the Tire and Rim Association Inc. in the U.S.A.

[0013]

Similarly, the "regular load" and "regular internal pressure" each indicate a maximum load and an internal air pressure observed under the maximum load in the application size ply rating defined in the YEAR BOOK 1999 issued by the Tire and Rim Association Inc. in the U.S.A.

[0014]

In addition, in the present specification, "the maximum width of tire ground contacting portion" indicates the maximum width of the grounding region in the tire axial direction of a tread when a tire is rimmed in a regular rim and inflated to the regular internal pressure, and a regular load is loaded on the tire statically.

[0015]

Here, a load represents the maximum load (maximum load capacity) of a single wheel of the application size described in the following standards. An internal pressure represents an air pressure that corresponds to the maximum load (maximum load capacity) of a single wheel of the application size. A rim represents a standard rim (or "approved rim" or "recommended rim") of the application size described in the following standards.

[0016]

In addition, the standards used herein are determined in accordance with the industrial standards valid to an area where tires are produced or used. Such standards are "YEAR BOOK of The Tire and Rim Association Inc." in the U.S.A; "Standards Manual of The European Tire and Rim Technical Organization" in Europe; and "JATMA Year Book" issued by Japan Automobile Tire Association in Japan.

[0017]

In the pneumatic tire according to claim 2, the depth of the recess portion is set to 10% to 45% of the maximum depth of a lug groove.

[0018]

With this construction, the depth of a recess portion is set to 10% to 45% of the maximum depth of a lug groove. Thus, heat radiation properties of the tread is improved, and the wear of the tread can be reduced.

[0019]

Namely, if the depth of the recess portion is less than 10% of the maximum depth of the lug groove, the recess portion becomes too shallow. In other words, the surface area of the

tire cannot be as large as desired, and heat radiation properties are lowered. On the other hand, when the depth of the recess portion is larger than 45% of the maximum depth of the lug groove, the rigidity of the tread is lowered, and is likely to be worn quickly. By setting the depth of the recess portion to be within the above range, the improvement in heat radiation properties and the reduction of wear can be made compatible with each other.

[0020]

According to claim 3, a recess portion of the pneumatic tire is an auxiliary groove sequentially formed in the circumferential direction of the tire.

[0021]

With this construction, the recess portion is provided as an auxiliary groove sequentially formed in the circumferential direction of the tire, whereby an air flow can be improved during tire rolling. Thus, heat radiation properties of the tire can be improved.

[0022]

In an pneumatic tire according to claim 4, the depth of the lug groove is gradually shallower from the shoulder side toward the tire central plane.

[0023]

A conventional tire has a structure in which the depth of the lug groove becomes suddenly deeper at a $1/8$ point toward the shoulder side. Thus, the distribution of the tread rigidity rapidly changes at a certain point, which adversely affects the tire wear resistance.

[0024]

In the case of the present invention, the depth of the lug groove is made gradually shallower from the shoulder side to the tire central plane, whereby the distribution of the tread rigidity can be made uniform, and the wear of the tread can be decreased.

[0025]

The term "gradually" in the present specification indicates that a region normal to a tire central plane (i.e., platform) is absent between a $1/4$ point and the tread central plane, and a gradient is about 80 degrees with respect to the central plane (that is, 10 degrees with respect to the tire axial direction) in a region that is $1/5$ or more of a tread single width. In addition, the term "rapidly" in the present specification indicates a state in which the maximum depth of the lug groove is set to 0 in the above setting region. In

general, the platform having the width (in the tire axial direction) of about 10% of a tread single width is provided near the tire central plane.

[0026]

According to claim 5, in the above pneumatic tire, the maximum depth of a lug groove in the center region that corresponds to 50% of the maximum width of tire ground contacting portion is 60 mm or more.

[0027]

With this construction, in particular, in a relatively large tire of 24.00R49 or more in size, the maximum depth of the lug groove in the center region that corresponds to 50% of the maximum width of tire ground contacting portion is set to 60 mm or more, whereby heat radiation properties of the tire can be effectively improved in spite of the increase in the tread volume and the heat generation.

[0028]

[Embodiments]

[First Embodiment]

Hereinafter, an pneumatic tire according to a first embodiment of the present invention will be described with reference to the accompanying drawing, Fig. 1.

[0029]

As shown in Fig. 1(A) and Fig. 1(B), at a tread 12 of an pneumatic tire 10 (hereinafter, referred to as tire 10) according to the present embodiment, lug grooves 14 (main grooves) that extend from a shoulder portion to a tire central plane CL are formed in plurality in the tire circumferential direction (indicated by the arrow A) at certain spacing. In addition, on the tire central plane CL, a continuous auxiliary groove 16 (recess portion) is continuously provided in the tire circumferential direction so that the tire central plane CL-side end of the lug groove 14 is each connected thereto. Further, a land portion 18 is provided between the adjacent lug grooves 14.

[0030]

In other words, in the tread 12, when a region corresponding to within 50% (440 mm in the present embodiment) of the maximum width W (880 mm in the present embodiment) and extending symmetrical with respect to the central plane CL is defined as a center region 20, and the regions located on the tire-axial direction outer sides of the center region 20 are defined as side regions 22, the lug groove 14 is formed so that its depth becomes gradually shallower from the side region over the center region 20. In particular, the maximum depth in the

center region 20 is set to 60 mm or more (the depth D is 85 mm at a $1/4$ point (at a distance of $W/4$ from the center central plane CL) in the present embodiment). In addition, the negative ratio in the center region 20 (a negative groove 14 corresponds to negative portion) is set within the range of 15% to 25%.

[0031]

On the other hand, an auxiliary groove 16 is formed in the center region 20. By forming this auxiliary groove 16, the negative ratio in the center region 20 other than the lug groove 14 (here, the auxiliary groove 16 corresponds to the negative portion) is set to 10% to 25%. In addition, the depth "d" of the auxiliary groove 16 is set to 10% to 45% of the maximum depth of the lug groove 14. In the present embodiment, the depth "d" is set to 12 mm, and the width H of the auxiliary groove 16 is set to 50 mm.

[0032]

This auxiliary groove 16 is not limited to one, and may be provided in any number as long as the above setting is met.

[0033]

In addition, with respect to the physical properties of a tread rubber used in a tread 12, it is preferable that $\tan \delta$ at the room temperature (25 °C) is set to 0.05 to 0.4, and

the Young modulus (E') is set to 3×10^6 to 20×10^6 (Pa).

[0034]

Next, an action and effect of the pneumatic tire 10 will be described with reference to Figs. 4 and 5.

[0035]

Firstly, Figs. 4 and 5 will be described.

[0036]

Fig. 4(A) is a graph depicting a relationship between a wear index (longitudinal axis) and a negative ratio (horizontal axis) of the center region 20 other than the lug groove 14. Fig. 4(B) is a graph depicting a relationship between a temperature reduction effect (longitudinal axis) and a negative ratio (horizontal axis) of the center region 20 other than the lug groove 14.

[0037]

Fig. 5(A) is a graph depicting a relationship between a wear index (longitudinal axis) and a rate (horizontal axis) of the depth of an auxiliary groove 16 with respect to the maximum depth of the lug groove 14. Fig. 5(B) is a graph depicting a relationship between a temperature reduction effect (longitudinal axis) and a rate (horizontal axis) of the depth

of the auxiliary groove 16 with respect to the maximum depth of the lug groove 14.

[0038]

Fig. 4 shows values obtained under a condition in which the depth of the auxiliary groove 16 with respect to the maximum depth of the lug groove 14 is set to 15% (constant). Fig. 5 shows values obtained under a condition in which the negative ratio of the center region 20 other than the lug groove 14 is 12.5% (constant).

[0039]

In addition, the solid lines in Fig. 4(A) and Fig. 5(A) denote curves obtained when a lug groove 14 formed to be gradually shallower from a $1/4$ point toward the tire central plane CL is tested; and the dotted lines in these figures denote curves obtained when a lug groove 14 formed to be rapidly deeper from a $1/8$ point (a point of $W/8$ distance from the tire central plane CL) is tested.

[0040]

Further, the term "wear index" in the figures represents a value that indicates a time for a belt disposed inside of the tire 10 to be exposed in the center region 20 (between the $1/4$ points) (hereinafter, this belt-exposing phenomenon will be

referred to as "belt exposure"), and the term "temperature" represents an average temperature in the center region 20 (between 1/4 points).

[0041]

When a tire 10 is rolled, the tread 12 is repeatedly bent and deformed, and the tread 12 is heated. In the tire 10 according to the present embodiment, an auxiliary groove 16 is formed in the center region 20 of the tread 12. Therefore, the tread volume in the vicinity of the center region 20, i.e., tire central plane CL is reduced, and the compression stress of the center region 20 is alleviated. As a result, the amount of heat radiation in the vicinity of the tire central plane CL decreases, and the surface area of the tire 10 increases. Thus, a heat radiation effect is improved, and a temperature increase in the vicinity of the tire central plane CL during roll of the tire can be reduced.

[0042]

Further, as shown in Fig. 4, by forming the auxiliary groove 16, a negative ratio in the center region 20 other than the lug groove 14 is set to 10% to 25%. In other words, a decrease in tread volume can be reduced to the minimum with this structure, thereby suppressing the wear of the tread 12 to the minimum. As a result, the temperature reduction effect of the

tread 12 and the reduction of wear can be made compatible with each other.

[0043]

Furthermore, as shown in Fig. 5, the depth of the auxiliary groove 16 is set to 10% to 45% of the maximum depth of the lug groove 14, whereby the deterioration of rigidity of the tread 12 can be suppressed to the minimum. In other words, with such a structure, the temperature reduction effect of the tread 12 and the reduction of wear can be made compatible with each other.

[0044]

The depth of the lug groove 14 is formed to become gradually shallower from the shoulder side toward the tire central plane CL. Thus, the distribution in rigidity of the tread 12 becomes homogeneous, which is desirable in terms of effecting an excellent wear resistance of the tire 10.

[Second Embodiment]

An pneumatic tire 30 according to a second embodiment of the present invention will be described hereinafter.

[0045]

In the present embodiment, like elements of the pneumatic tire 10 according to the first embodiment are omitted conveniently, and like elements are designated by like

reference numerals.

[0046]

As shown in Fig. 2 (A) and Fig. 2 (B), in the pneumatic tire 30 according to the present embodiment, a plurality of auxiliary grooves 32 that extend in the tire circumferential direction (as indicated by the arrow A) are formed at the positions of substantially 1/8 point of a land portion 18 (refer to the drawings) so that each auxiliary groove 32 is located between the adjacent lug grooves 14. The auxiliary groove 32 is formed in substantially rectangular shape, and the circumferential direction end portions thereof communicate with the lug groove 14.

[0047]

In the present embodiment, the width H of the auxiliary groove 16 formed on the tire central plane CL is set to 50 mm, and the depth "d" is set to 35 mm. In addition, the width S of the auxiliary groove 32 formed at the 1/8 point is set to 25 mm, and the depth "t" is set to 35 mm.

[0048]

In addition, in the pneumatic tire 30 according to the present embodiment, the maximum width W of the tire ground contacting portion is set to 1200 mm (600 mm at one side); a

distance between the tire central plane CL and the 1/4 point is set to 300 mm; and the depth D of the lug groove 14 at the 1/4 point is set to 89 mm.

[0049]

In the pneumatic tire 30 according to the present embodiment, an effect similar to that achieved by the pneumatic tire 10 according to the first embodiment is obtained, and the improvement in a heat radiation effect and the reduction of wear can be made compatible with each other.

[Third Embodiment]

An pneumatic tire 40 according to a third embodiment of the present invention will be described hereinafter.

[0050]

In the present embodiment, like elements of the pneumatic tire 10 according to the first embodiment are omitted conveniently, and like elements are designated by like reference numerals.

[0051]

As shown in Fig. 3(A) and Fig. 3(B), in the pneumatic tire 40 according to the present embodiment, a plurality of circular auxiliary grooves 42 are formed at the positions of substantially 1/8 point of the land portion 18 so that each

circular auxiliary groove 42 is located between the adjacent lug grooves 14.

[0052]

In the present embodiment, the width H of the auxiliary groove 16 formed on the tire central plane CL is set to 50 mm, and the depth "d" thereof is set to 35 mm. In addition, the diameter R of the auxiliary groove 42 is set to 70 mm, and the depth "l" thereof is set to 20 mm.

[0053]

In addition, in the pneumatic tire 40 according to the present invention, the maximum width W of the tire ground contacting portion is set to 1200 mm (600 mm at one side); a distance between the tire central plane CL and the 1/4 point is set to 300 mm, and the depth D of the lug groove 14 at the 1/4 point is set to 89 mm.

[0054]

In the pneumatic tire 40 according to the present embodiment, an effect similar to that achieved by the pneumatic tire 10 according to the first embodiment is obtained, and the improvement in a heat radiation effect and the reduction of wear can be made compatible with each other.

[0055]

A definite self-closing type groove such as an ellipsoidal one may be formed as a shape other than the circular auxiliary groove 42.

[Test Example]

Now, the test results of the pneumatic tires 10, 30, and 40 according to the embodiments will be described here.

[0056]

The pneumatic tires 10, 30, and 40 according to the aforementioned embodiments were mounted on a regular rim based on TRA, and the wear performance evaluation and the heat radiation performance evaluation were each carried out. The test results are shown in a table of Fig. 6. Here, the term "wear index" in the table expresses exponentially a running time required for the belt exposure between the 1/4 points at the testing site. Here, it is indicated that the smaller value is, the more easily wear occurs. In addition, the term "temperature" is defined as an average temperature between the 1/4 points observed after a drum running for 24 hours at the regular internal pressure and under the regular load.

[0057]

Referring to this table, with respect to the pneumatic tire 10 (tire size ORR 37. 00 R57) according to the first

embodiment, the average temperature was lowered by 4 °C as compared with a conventional pneumatic tire in which the auxiliary groove 16 is not formed. On the other hand, deterioration of the wear index was suppressed to only 2 points dropping.

[0058]

With respect to the pneumatic tire 30 (tire size ORR 55/80 R63) according to the second embodiment, the average temperature was lowered by 6 °C as compared with a conventional pneumatic tire. On the other hand, deterioration of the wear index was suppressed to only 4 points dropping.

[0059]

With respect to the pneumatic tire 40 (tire size ORR 55/80 R63) according to the above third embodiment, the average temperature was lowered by 7 °C as compared with a conventional pneumatic tire. On the other hand, deterioration of the wear index was suppressed to only 4 points dropping.

[0060]

From the above test results, in any of the pneumatic tires 10, 30, and 40 according to the first to third embodiments of the present invention, the temperature can be lowered by 3 °C or more without dropping the wear index by 5 points or more as

comparison with a conventional pneumatic tire. In other words, it was found that lowering of temperature and reduction of wear can be made compatible with each other.

[0061]

[Effects of the Invention]

According to the pneumatic tire of the present invention, the tread wear can be reduced to the minimum, and a heat radiation effect can be improved.

[BRIEF DESCRIPTION OF THE DRAWINGS]

[Fig. 1]

Fig. 1(A) is a plan view showing a tread of an pneumatic tire according to a first embodiment of the present invention, and Fig. 1(B) is a sectional view taken along line 1B-1B of the tread shown in Fig. 1(A).

[Fig. 2]

Fig. 2(A) is a plan view showing a tread of an pneumatic tire according to a second embodiment of the present invention, and Fig. 2(B) is a sectional view taken along line 2B-2B of the tread shown in Fig. 2(A).

[Fig. 3]

Fig. 3(A) is a plan view showing a tread of an pneumatic tire according to a third embodiment of the present invention, and Fig. 3(B) is a sectional view taken along line 3B-3B of the

tread shown in Fig. 3(A).

[Fig. 4]

Fig. 4 shows graphs depicting a relationship between a wear index (longitudinal axis) and a negative ratio (horizontal axis) in a center region other than a lug groove and a relationship between a temperature reduction effect (longitudinal axis) and a negative ratio (horizontal axis) in a center region other than a lug groove.

[Fig. 5]

Fig. 5 shows graphs depicting a relationship between a wear index (longitudinal axis) and a rate (horizontal axis) of a depth of an auxiliary groove with respect to the maximum depth of a lug groove and a relationship between a temperature reduction effect (longitudinal axis) and a rate (horizontal axis) of a depth of an auxiliary groove with respect to the maximum depth of the lug groove.

[Fig. 6]

Fig. 6 is a table showing the test result in the pneumatic tire according to each of the embodiments of the present invention.

[Description of the Reference Numerals]



10, 30, 40: pneumatic tires

14: lug grooves

16, 32, 42: auxiliary grooves (recess portions)


18: land portions

[FIG. 1]

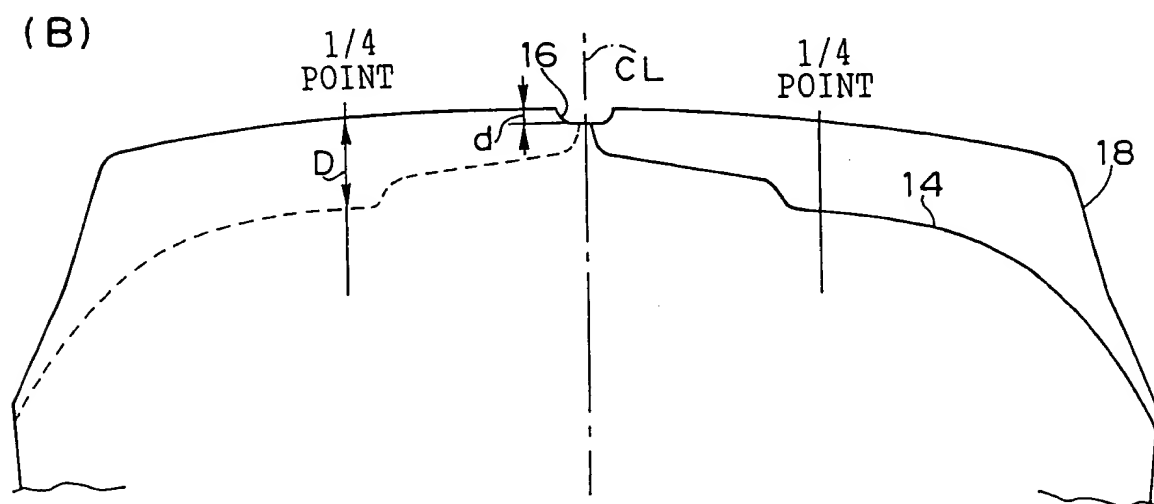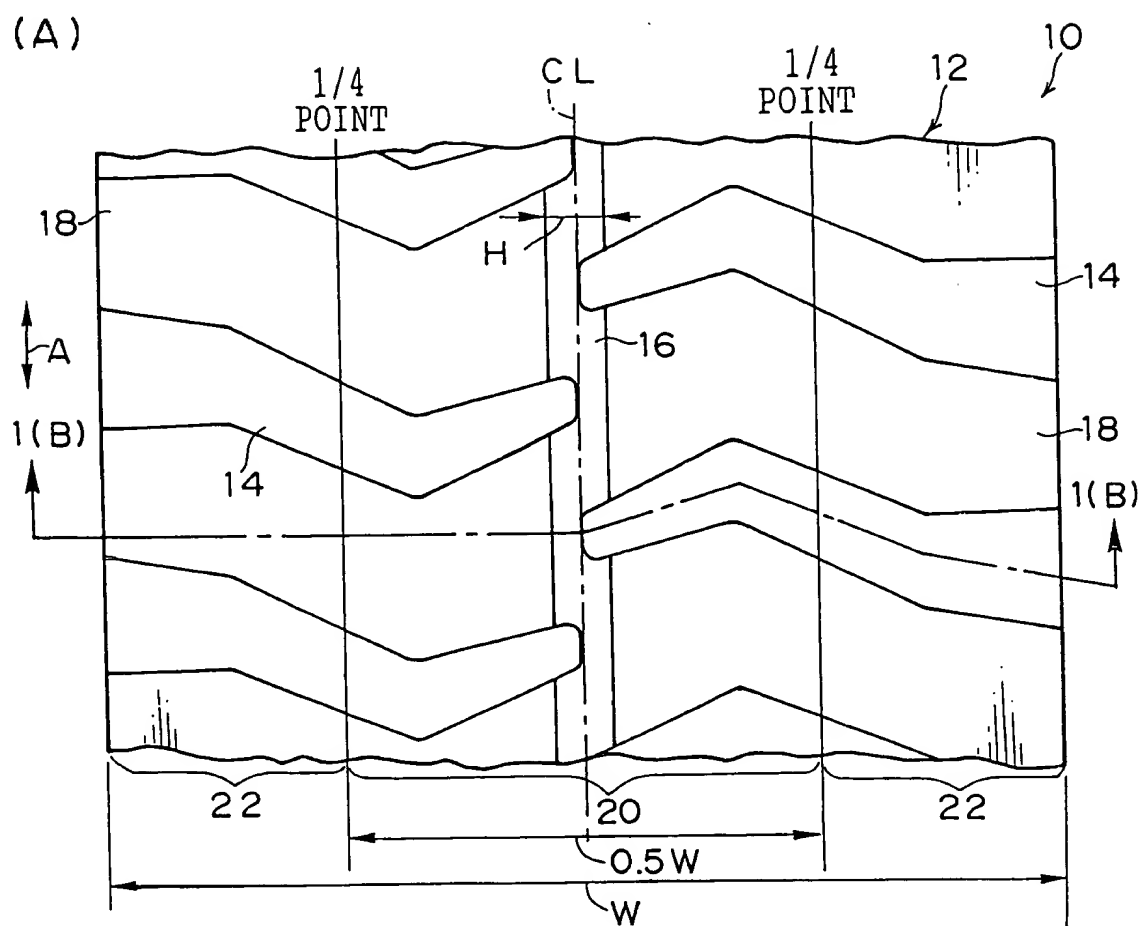


[FIG. 2]

(A)

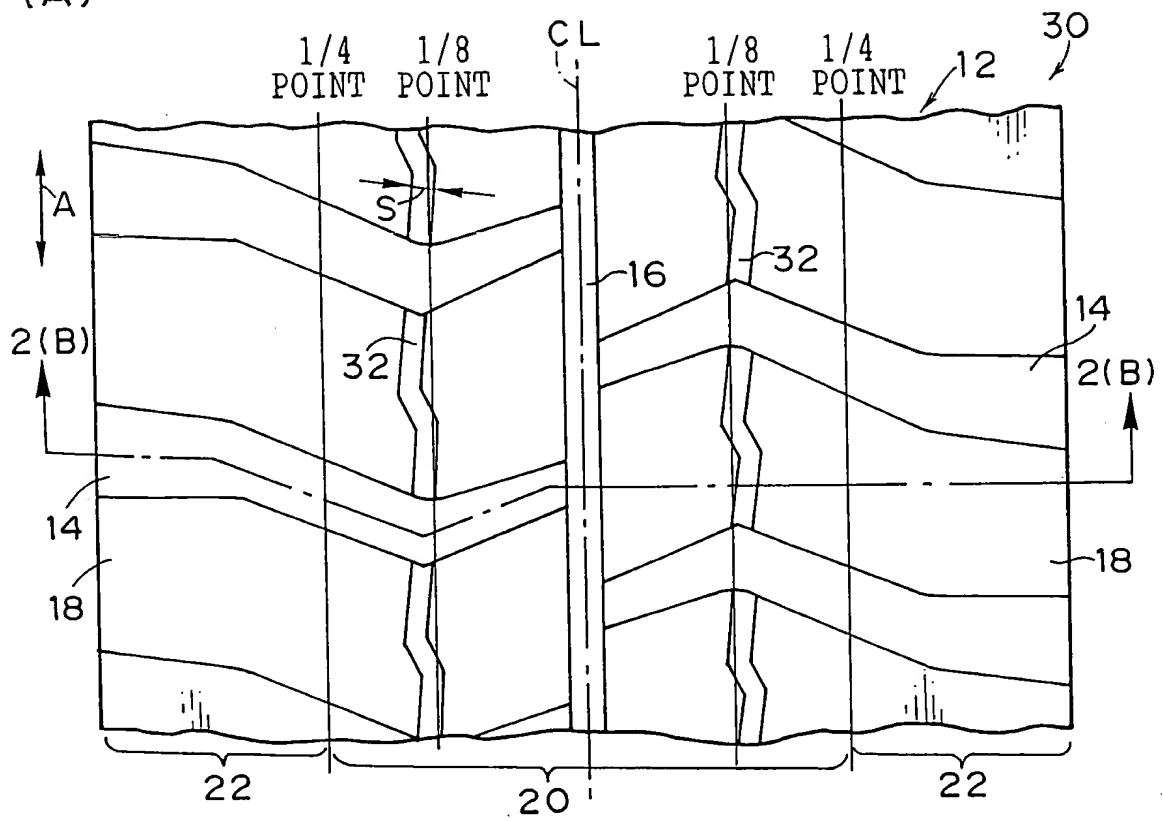


(B)

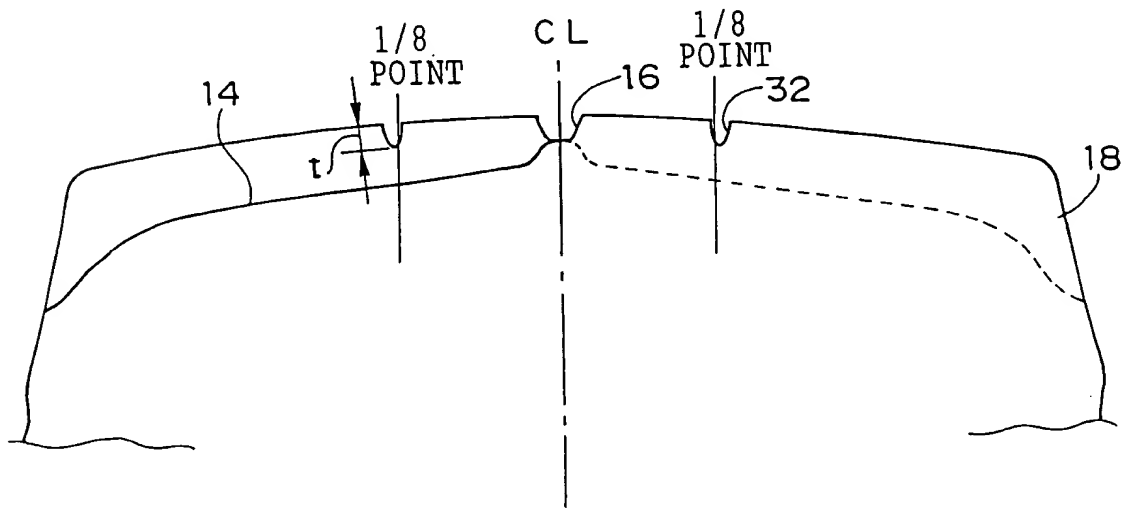


[FIG. 3]


(A)

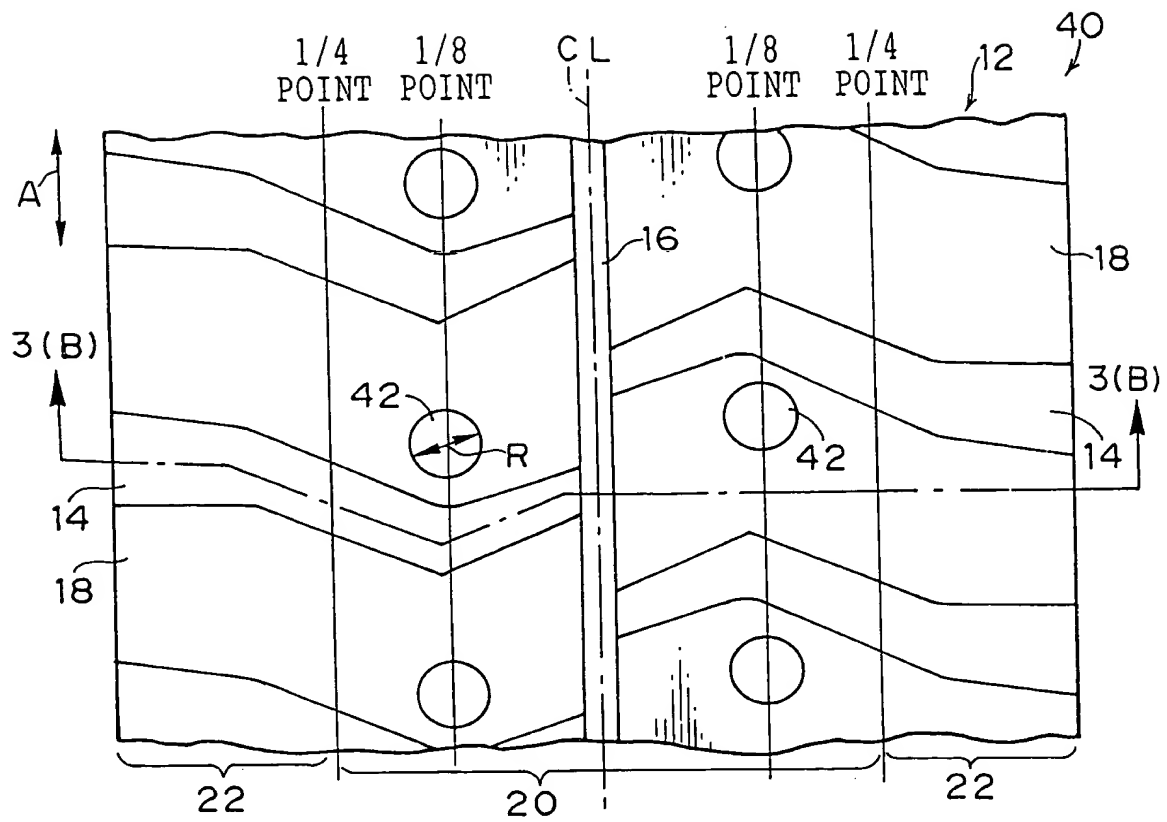


(B)

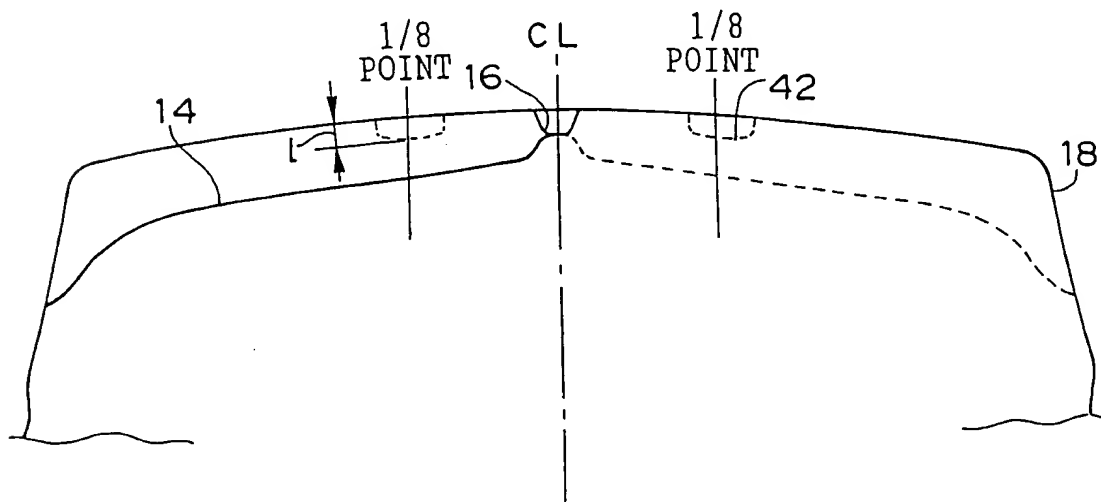

[FIG. 4]

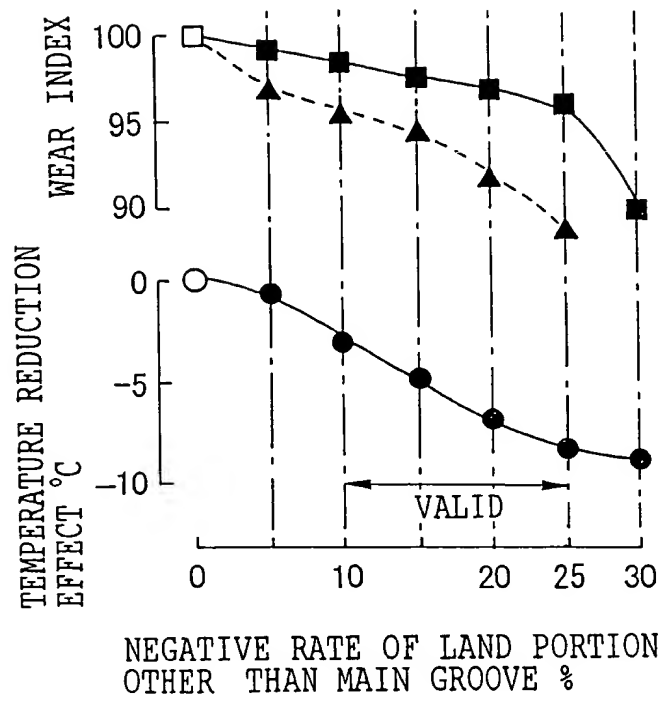

[FIG. 5]

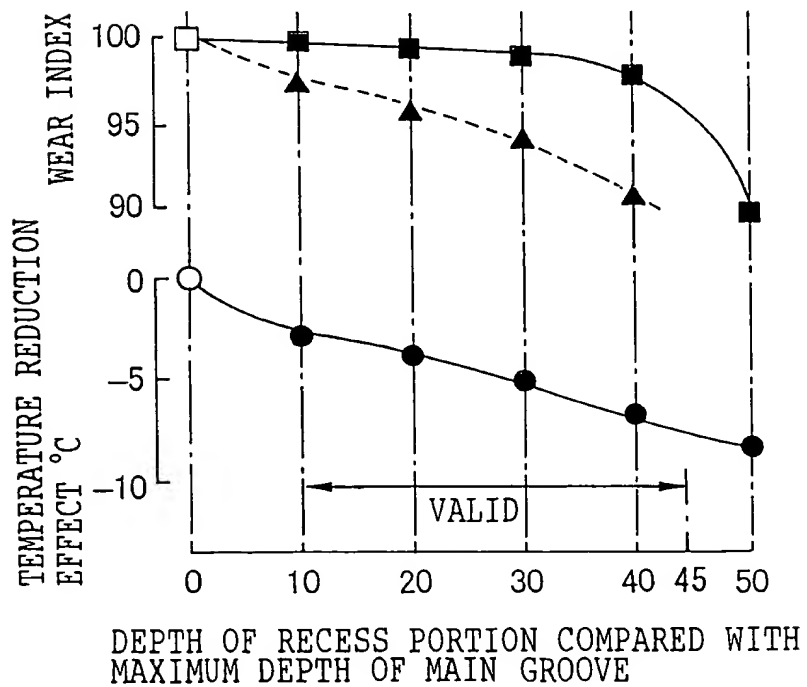

[FIG. 6]

	FIRST EMBODIMENT		SECOND EMBODIMENT		THIRD EMBODIMENT	
	BEFORE ADDING RECESS PORTION	AFTER ADDING RECESS PORTION	BEFORE ADDING RECESS PORTION	AFTER ADDING RECESS PORTION	BEFORE ADDING RECESS PORTION	AFTER ADDING RECESS PORTION
APPLIED RIM	27.00/6.0		41.00/5.0		41.00/5.0	
REGULAR INTERNAL PRESSURE	700kPa		600kPa		600kPa	
REGULAR LOAD	51.5 ton		94.5 ton		94.5 ton	
WEAR INDEX	100	98	100	96	100	96
AVERAGE TEMPERATURE BETWEEN 1/4 POINTS	98°C	94°C	110°C	104°C	110°C	103°C
NEGATIVE RATE OF LAND PORTION OTHER THAN MAIN GROOVE		12.5%		20%		22%
DEPTH OF RECESS PORTION COMPARED WITH MAXIMUM DEPTH OF MAIN GROOVE		15%		40%		40%

[DOCUMENT NAME] ABSTRACT OF THE DISCLOSURE

[SUMMARY]

[OBJECT]

To obtain a pneumatic tire which can reduce tread wear to the minimum and improve a heat radiation effect.

[MEANS FOR SOLUTION]

An auxiliary groove 16 is formed in a tire circumferential direction on a tire central plane CL of a pneumatic tire 10. This auxiliary groove 16 is formed, whereby a negative ratio of a center region 20 other than a lug groove 14 is set to 10% to 25%. Thus, a heat radiation quantity of a tread 12 can be decreased, and a surface area of the tire 10 can be increased. As a result, heat radiation properties can be improved. In addition, as long as the negative ratio is within the above set range, the wear of the tread 12 can be reduced to the minimum.

[SELECTED FIGURE]

Fig. 1